

FICHA TECNICA REFLECTOR LED SMD 100W



Outdoor IP66

100W LED

Flood Light

led floodlight

Type LED Flood light

Model: NEO LUZ LED

FLOOD SMD 100W

Watt 100W

Efficiency 140-

170lm/w

Specification 280*25

0*45mm

Material Aluminum+

Tempered Glass

Color Black

Outdoor IP66

100W LED

Flood Light



**Materials:**

Die casting Aluminum body
Tempered glass lens

Features:

IP66 waterproof, install with breathing valve, can clean up the moisture inside of lamp and keep balance of pressure difference between lamp inside and outside.

270degree rotate bracket

50,000 hours lifetime

Application:


Building Appearance Lighting and Landscape Lighting

Marking and Indicative Lighting

Indoor Space Display Lighting

Tunnel and road lighting

Gymnasium stadium lighting

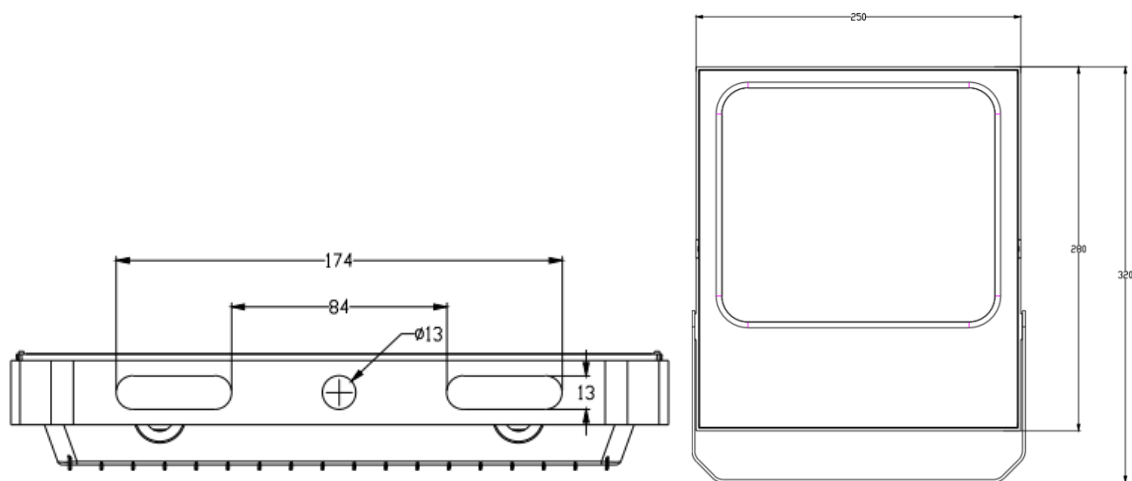

Specifications

Model	NEO LUZ
Wattage	100W
Light efficacy	140-170lm/w
Lumen	14000-17000lm
Voltage	100-277VAC
LED TYPE	MULTILEDs
Certificates	ETL cETL CE SAA CB RoHS DLC 5.1
Light color	6500k CW
IK	IK08
Surge Protection	4KV/10KV
IP grade	IP66
Power Factor	>0.95
Beam angle	120°
Shell Color	BLACK
Size	280*250*45mm
N.W	2KG
warranty	1 year

Adapt to the temperature of different environments





❄ Low temperature resistance -20°C ☀ High temperature resistance 40°C





MUNDO LED

APAGUE EL CONSUMO, ENCIENDA LOS LEDS

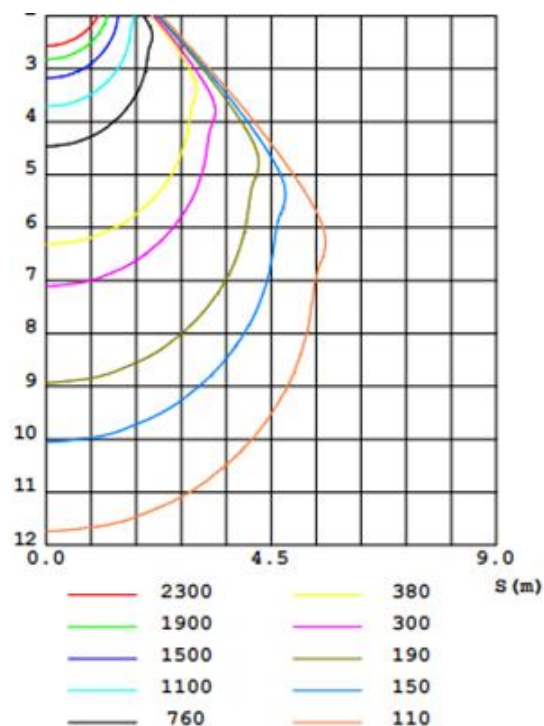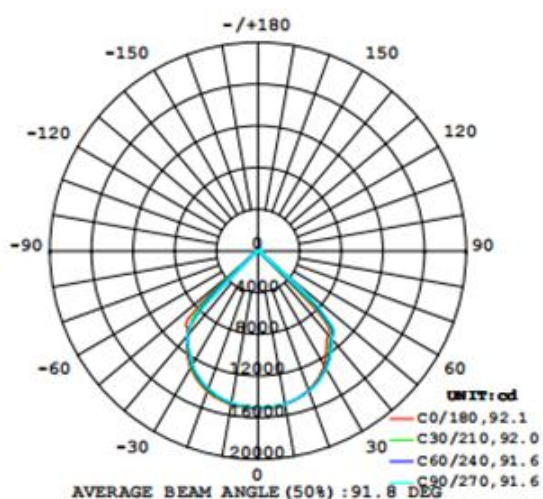



Advantages:

Frosted tempered glass, effective against impacts
Atomization treatment, uniform and soft light output.
IP66 waterproof design, waterproof, dustproof,
protect the lamp body and extend the service life.
High quality LED chip, which can save more than
85% electricity, thus saving your electricity bill.



Dustproof net

Protects the lamp from other debris.

Waterproof IP66

IP66 waterproof, safer for outdoor use.