

■ **Lighting technical data**

LED LAMP 200W-150W-100W HIGH BAY LIGHT

Lighting technical data

LED 200W-150W-100W HIGH BAY LIGHT is an alternative light source with longer life and uniformed light distribution



RoHS IP65



LED HIGH BAY LIGHT



Line-Up

Model No.	Selectable Watts(W)	Light Output(lm)	Dimension(mm)	Light Color(K)	Beam Angle(Degree)
	200±10%	28000±10%	Ø300 *H161	6500K	120
	150±10%	21750±10%	Ø300 *H161	6500K	120
	100±10%	15000±10%	Ø300 *H161	6500K	120

Technical Specifications

Item	Test Conditions	Min.	Typ.	Max.
Input Voltage(V, rms)	AC	100	100	277
Input Current(mA, rms)	AC(100V)	---	910	---
Input Power(W, rms)	AC(All)	200	200	200
Input Frequency(Hz)	AC	---	50Hz/60Hz	---
Power Factor(PF)	AC(All)	≥0.95		
Output Voltage(V)	DC	62	63	64
Output Current(A)	DC	3.12	3.16	3.2
Output Power(W)	DC	193.4	199	204.8



Environmental Requirements

Specifications	Values
Operational Temperature Range	-40~40℃
Preservation Temperature Range	-40~90℃
Operational Humidity Range	95%Rh or below (@-40~40℃)
Installation Area	Indoor (Counter,Residential,Commercial,etc)


LED HIGH BAY LIGHT




Drawing

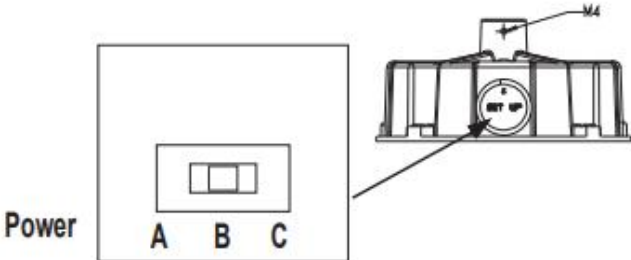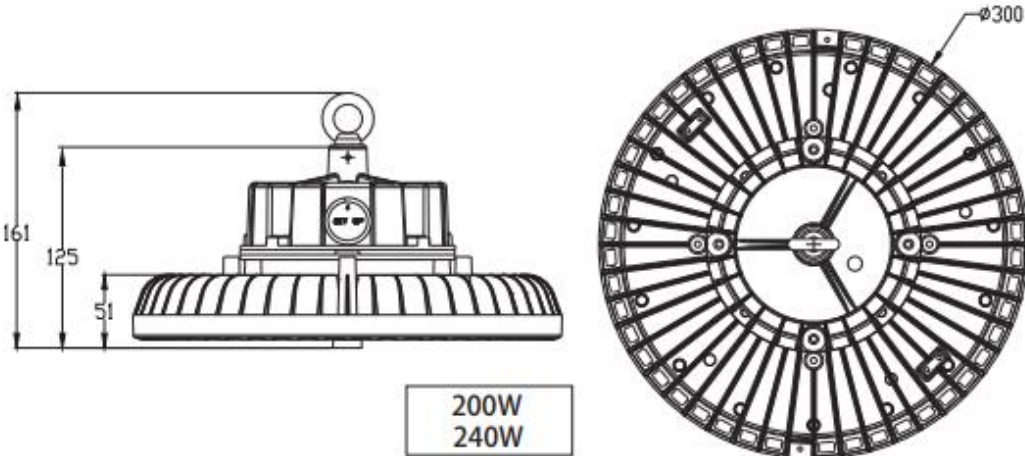

A=200W B=150W C=100W

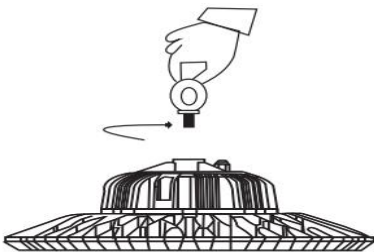

Step1
Turn the ring clockwise into the power supply

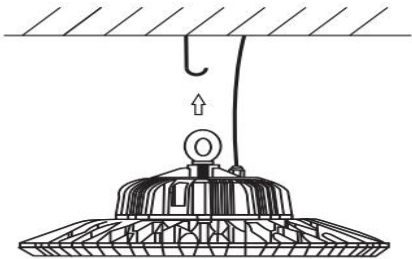

Step2
First, according to the graphic lamp hanging hook above, and then connect the power first

Material	IP
radiator: ADC12	65
lens: PC	

LED HIGH BAY LIGHT



LN-UFOMX200-SWP-CW-B-U-C-00

Category	Specifications	Unit
Watts	200/150/100	W
Lumens per Watt(Efficacy)	140-150	Lm/W
Light Output	28000/21750/15000	lm
Light Color(CCT)	6500	K
Beam Angle	120	°(degree)
Color Accuracy(CRI)	70	Ra
Product Weight	3.5	KG
Rating Life	50000	H
Base	Line interface	
Input Voltage(AC)	100-277	V

LED HIGH BAY LIGHT



Product Packaging	Specifications	Unit
Product Dimension	Ø300 *H161	mm
Net Weigh	3.5	Kg
Size of box	350*350*170	mm
Qty/ Carton	1	PCS
Gross Weight	3.8	Kg

Revision History

Time	Changed to: VER	Description of Change		
		Item	From	To